


Ce document vous est fourni par Supratec ENOMAX
Partenaire officiel de Finn.Power en France
www.supratec-enomax.com

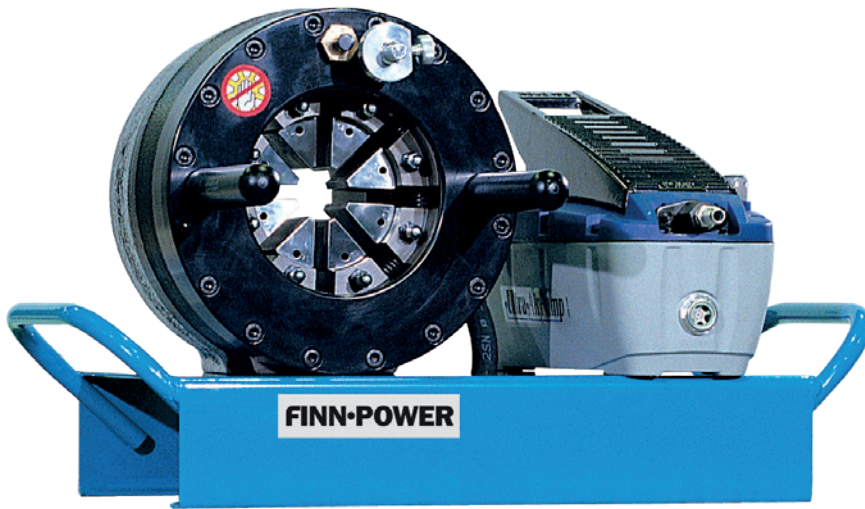

P20AP

THE POWER IN SERVICE CRIMPING

Finn-Power P20AP is a compact air pressure operated model for repair and maintenance needs. Ideal for workshops or field service use.


Easy crimping diameter adjustment and light indication for fast and reliable crimping results.

Please also see product cards for other power pack configurations.

TECHNICAL DATA	
Max. crimping dia (mm) ¹⁾	61
Max. crimping dia (inch) ¹⁾	2.40
Max. crimping force (kN)	1370
Max. crimping force (tonnage)	137
Cycle time 10 mm (s) 1-phase ²⁾	10.3
Cycle time 10 mm (s) 3-phase ²⁾	3.6
Hose size ID (inch)	1½ (2SN) / 1¼ (4SP)
Die set series	20
Max. opening (mm) ³⁾	+25
Max. opening without dies (mm)	109
Master die D/L (mm)	84/80
Master die D/L (inch)	3.31/3.15
Motor Power	Air pressure

DIMENSIONS (LxWxH)	
(mm)	583x477x345
(inch)	22.9x18.8x13.6

WEIGHT (KG/LBS)	
	59/130

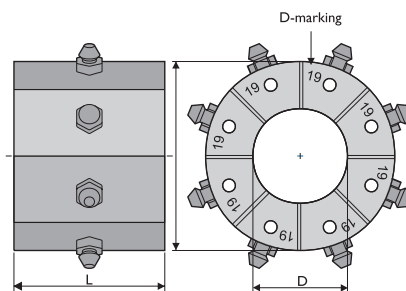

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10mm cycle.
- 3) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

CONTROL

Manual

OPTIONS

- QuickChange-tool
- Mechanical back stop device



DIE SET 20-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18013/10	10	55	10.0-12.0
18013/12	12	55	12.0-14.0
18013/14	14	55	14.0-16.0
18013/16	16	55	16.0-19.0
18013/19	19	55	19.0-23.0
18013/23	23	55	23.0-27.0
18013/27	27	70	27.0-31.0
18013/31	31	70	31.0-36.0
18013/36	36	75	36.0-41.0
18013/41	41	75	41.0-47.0
18013/47	47	85	47.0-54.0
18013/54	54	85	54.0-61.0

In addition to the standard die sets, a wide range of special die sets is available on request.

**FURTHER INFO ON OPTIONS,
PLEASE REVERT TO SPECIFIC PRODUCT CARD**

POWERCO.LILLBACKA.COM LILLBACKAUSA.COM